



APPROVAL SHEET
FOR
BUZZER SPECIFICATION

GUANGZHOU YUENENG TECHNOLOGY CO., LTD.

CUSTOMER:

MODEL NO.: YN-YDW2304-40W-60

OUR PART NO.:

CUSTOMER PART NO.:

CUSTOMER	APPROVED	CHECKED

Add: ,132 Shishu Road, Yuexiu District, Guangzhou City, Guangdong China.

Mobile:+86-18924165988

skype:18924165988

WhatsApp: +86-18924165988

Email: cngzyn@163.com

1. Technical Parameter


Measuring condition

Part shall be measured under a condition (Temperature: 5 ~ 35°C, Humidity: 45% ~ 85%R.H., Atmospheric pressure: 860 ~ 1060hPa) unless the standard condition (Temperature: 25±3°C, Humidity: 60±10%R.H. Atmospheric pressure: 860 ~ 1060hPa) is regulated to measure.

1	Rated Voltage	3Vo-p; 5Vo-p; 12Vo-p;
2	Operating Voltage	1-30Vo-p
3	Rated Current	Max3mA ; Max5mA; Max5mA ;
4	Sound Output at 10cm	Min. 80dB; Min. 85dB; Min. 85dB ;
5	Resonant Frequency	4000Hz±0.5
6	Operating Temperature	-10°C~+60°C
7	Store Temperature	-20°C~+70°C
8	Net Weight	Approx 2.2g
9	Tone Nature	Constant
10	Dimension	Φ22.8 x H4 mm
11	R o H S	Yes

2. Dimensions

Unit: mm

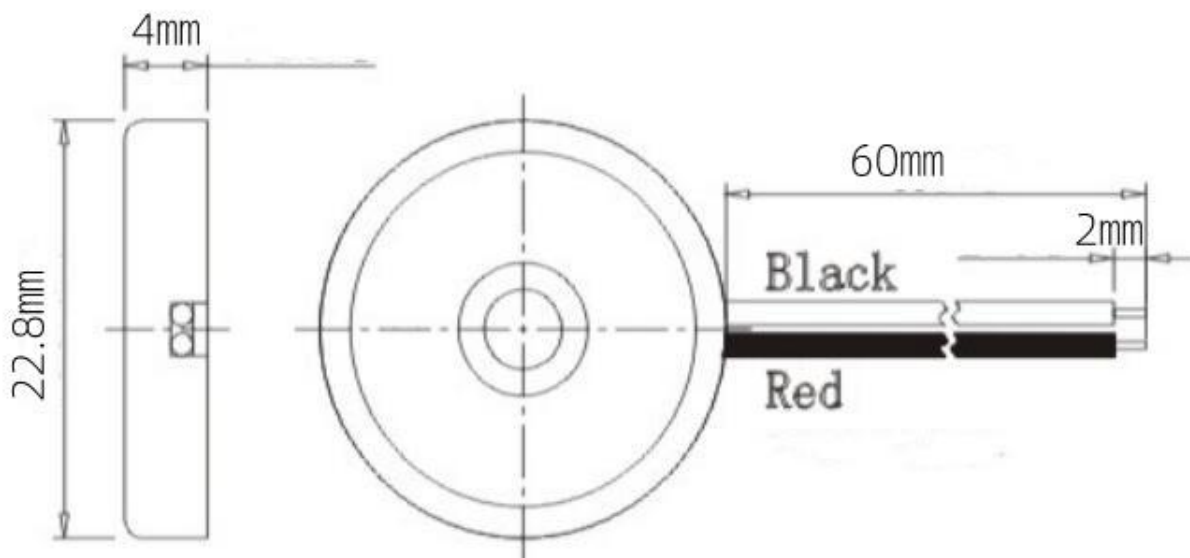


*Unit: mm; Tolerance: ±0.3mm Except Specified

*Housing Material: Black LCP

*Terminal plate: 3 soldering pads, tin Plating Brass

3. Electrical And Acoustical Measuring Condition

Recommended Driving Circuit

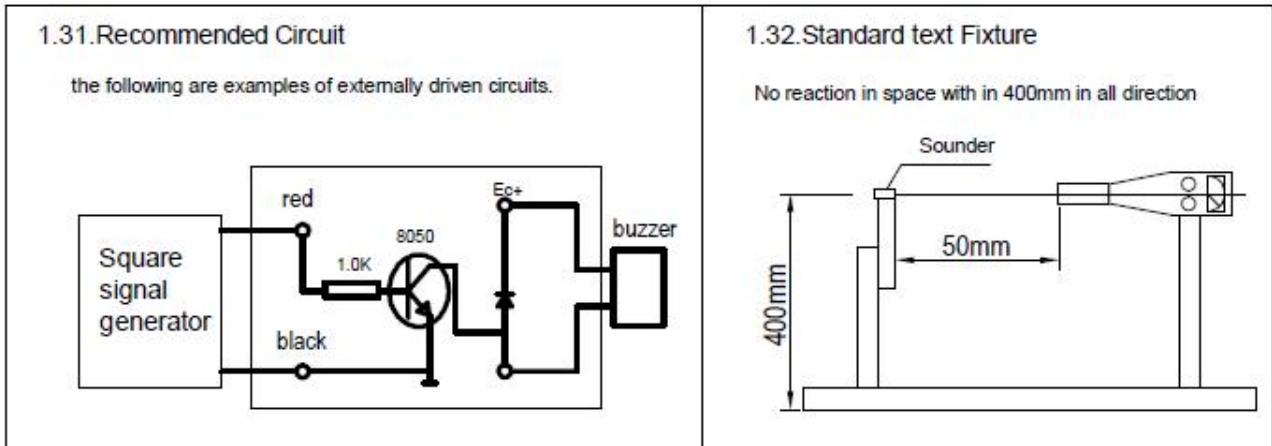

4. Frequency Response

