



YNKJ
BUZZER SPECIFICATION

GUANGZHOU YUENENG TECHNOLOGY CO., LTD.

CUSTOMER:

MODEL NO. : YN-YDY2310-3512P-15

OUR PART NO. . . :

CUSTOMER PART NO. :

CUSTOMER	APPROVED	CHECKED

Add: ,132 Shishu Road, Yuexiu District, Guangzhou City, Guangdong China.

Mobile:+86-18924165988

skype:18924165988

WhatsApp: +86-18924165988

Email: cngzyn@163.com

1. Technical Parameter


Measuring condition

Part shall be measured under a condition (Temperature: 5 ~ 35°C, Humidity: 45% ~ 85%R.H., Atmospheric pressure: 860 ~ 1060hPa) unless the standard condition (Temperature: 25±3°C, Humidity: 60±10%R.H. Atmospheric pressure: 860 ~ 1060hPa) is regulated to measure.

1	Rated Voltage	3Vo-p; 5Vo-p; 12Vo-p; 24Vo-p
2	Operating Voltage	3~24Vo-p
3	Rated Current	Max:8mA(3v); Max:8mA(5v); Max:10mA(12v)
4	Sound Output at 10cm	Min. 83dB(3V);Min. 83dB(5V);Min.85dB(12V)
5	Capacitance at 120Hz	\
6	Resonant Frequency	3500±500Hz (IN)
7	Operating Temperature	-10°C~+60°C
8	Store Temperature	-20°C~+70°C
9	Net Weight	Approx 3.3g
10	Tone Nature	Constant
11	Dimension	Φ23x H9.8 mm Lead wire
12	R o H S	Yes

2. Dimensions

Unit: mm

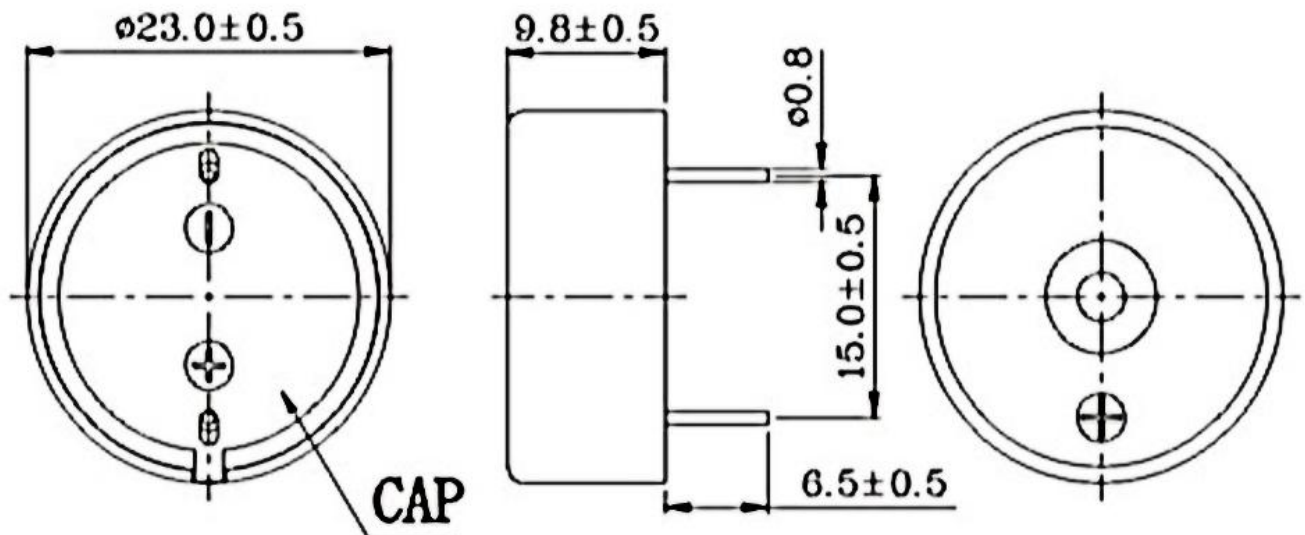


*Unit: mm; Tolerance: ± 0.3 mm Except Specified

*Housing Material: Black LCP

*Terminal plate: 3 soldering pads, tin Plating Brass

3. Electrical And Acoustical Measuring Condition

Recommended Driving Circuit

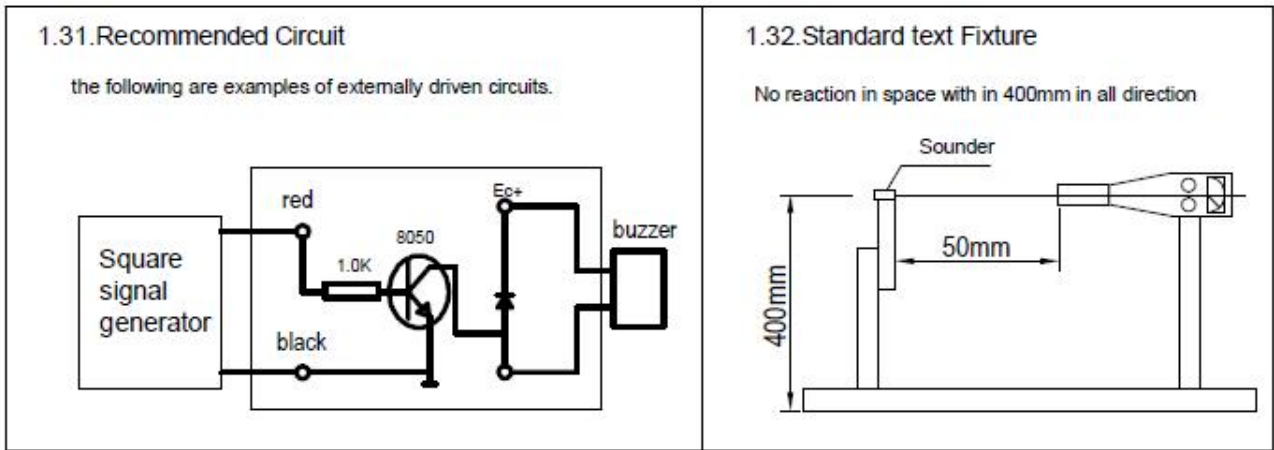

4. Frequency Response

